


RECOMMENDED BASE LAYER DEPTHS	
DEPTHS LISTED BELOW ARE SUBJECT TO CBR TESTS AND THE	
DESIGN ENGINEER'S SUBGRADE SUPPORT CALCULATIONS.	
PEDESTRIAN TRAFFIC	0" MIN.
PASSENGER VEHICLE TRAFFIC	4" MIN.
INDUSTRIAL TRAFFIC	6" MIN.


## NOTES:

- SUPPORT LAYER ~ 2in OF ANGULAR GRAVEL #78 OR SIMILAR. THICKNESS MAY BE REDUCED IF BASE CBR >6. COMPACT SUPPORT LAYER USING PLATE COMPACTOR OR SIMILAR BEFORE INSTALLING E40 GRIDS.
- 2. BASE LAYER AASHTO #57 CLEAN, WASHED ANGULAR STONE
- E40 MAY BE LEFT UNFILLED IF VEHICLE TIRE OR SURFACE LOAD PRESSURE <50 PSI. EDGES WHERE VEHICLES OR LOADS ENTER OR LEAVE SHOULD BE SUPPORTED BY GRAVEL FILLING OR SOLID EDGING TO MINIMIZE EDGE DEFORMATION. INSTALL ECORASTER LEVEL WITH ANY ADJACENT TRAVEL SURFACES. ANY FILLING TO BE PER ENGINEER OR PROJECT SPECIFICATIONS.
- 4. ALLOW FOR THERMAL EXPANSION WHEN INSTALLING IN A CONFINED AREA BY LEAVING ADEQUATE SPACE BETWEEN ECORASTER AND ADJACENT PAVEMENT OR HARD SURFACES. ECORASTER IS 100% RECYCLED LDPE WITH A WORKING TEMPERATURE RANGE OF 465 TO 150F
- RANGE OF -65 TO 150F.

  5. E40 INDIVIDUAL GRIDS ARE A NOMINAL 13x13x1.6in WHEN ASSEMBLED. A 3x4
  PREASSEMBLED MULTI GRID (SHOWN) IS SHIPPED TO THE JOB SITE FOR EASE OF
  INSTALLATION. WEIGHT IS 1.07 lb/sf. ECORASTER IS NONTOXIC TO FISH AND WILDLIFE.
- GRIDS SNAP TOGETHER WITH FOOT PRESSURE (NO TOOLS REQUIRED) AND CAN BE CUT ON SITE WITH RECIPROCATING SAW, CIRCULAR SAW, CONCRETE SAW OR SIMILAR.
- 7. ECORASTER CARRIES A 20 YEAR WARRANTY WHEN INSTALLED PER THIS DRAWING. CONSULT ENGINEER FOR ANY ADDITIONAL REQUIREMENTS ON ALL PROJECTS PRIOR TO CONSTRUCTION.
- 8. TYPICAL GRASS FILLING FOR THE E40 LAYER IS A SANDY LOAM PER GRASS TYPE. OTHER MATERIALS USED PER ENGINEER.
- BASE AND SUPPORT LAYER AGGREGATE SHOULD BE MIXED WITH ~30% TOPSOIL OR PER ENGINEER.

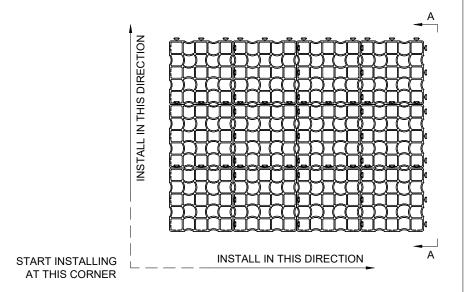

TOP VIEW
INTERCONNECTED BLOCKS

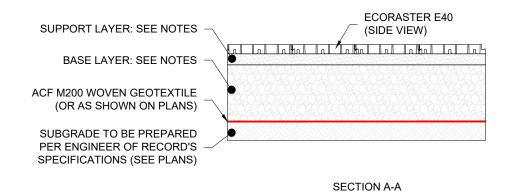



NOT TO SCALE

11/12/2022

## ECORASTER E40 STANDARD GRASS DETAIL AND SECTION

FOR ADDITIONAL INFORMATION PLEASE CONTACT: FERGUSON WATERWORKS, 1-800-448-3636, www.ferguson.com